

10 Rec'd PCT/PTC

07 JUL 2004

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
17 July 2003 (17.07.2003)


PCT

(10) International Publication Number
WO 03/058260 A1

- (51) International Patent Classification⁷: G01R 1/073 (74) Agent: NIELSEN, Henrik Steen; BUDDÉ, SCHOU & OSTENFELD A/S, Vester Søgade 10, DK-1601 Copenhagen V (DK).
- (21) International Application Number: PCT/DK03/00006
- (22) International Filing Date: 7 January 2003 (07.01.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PA 2002 00020 7 January 2002 (07.01.2002) DK
- (71) Applicant (for all designated States except US): CAPRES A/S [DK/DK]; c/o MIC, DTU Bygn. 345 Øst, DK-2800 Lyngby (DK).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): PETERSEN, Christian, Leth [DK/CA]; #204-488 West 40th Avenue, Vancouver, British Columbia CA-V5Y 2R4 (CA). NIELSEN, Peter Folmer [DK/DK]; Nordtøfsevej 31, DK-3520 Farum (DK).
- (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KB, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ELECTRICAL FEEDBACK DETECTION SYSTEM FOR MULTI-POINT PROBES

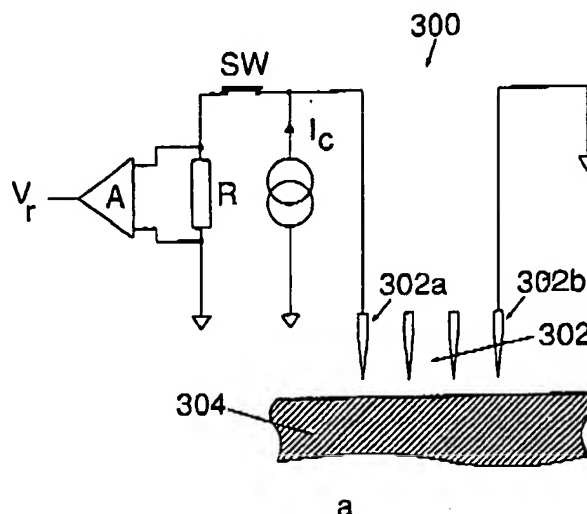

(57) Abstract: An electrical feedback detection system for detecting electrical contact between a multi-point probe and an electrically conducting material test sample surface. The electrical feedback detection system comprises an electrical detector unit connected to a multitude of electrodes in the multi-point probe, and optionally directly to the test sample surface. The detector unit provides an electrical signal to a multi-point testing apparatus, which can be used to determine if the multi-point probe is in electrical contact with the test sample surface. The detector unit comprises an electrical generator means for generating an electrical signal that is driven through a first multitude of electrodes of the multi-point probe, and a second multitude of switched impedance detection elements. The electrical potential across the impedance detection elements determines the electrical contact to the test sample surface.

WO 03/058260 A1